

. . . B i - F o l d i n g . . .

Index:
Standard profile frame

. . . A u t o m a t i c E n t r a n c e D o o r s e t . . .

The connect a.d. **B i - F o l d i n g Automatic Entrance Doorset** is ideal for medium to high volume traffic and disabled access in commercial environments, when space is a premium. The **standard profile frame** is most popular when upgrading the access and appearance of a building entrance.



Manufactured and Installed by connect a.d. at a Leisure Facility

Rev 2 : 12/08

The basic doorset comprises doorleaves and frame supplied either in single parting (2 sliding and folding leaves) or bi-parting (4 sliding and folding leaves), hinging open to the inside or outside depending on site conditions.

The doorleaves and frame are constructed from a standard aluminium profile and can be supplied as a complete entrance system with sidescreens and transom panels.

All complete doorsets are polyester powder coated to any BS or RAL colour, with Satin & Bronze Anodised finishes and Stainless Steel also available. Door colours should contrast surrounding colours to aid those with visual impairment.

Glazing options include single or double glazing in clear laminate, toughened, tinted or reflective glass, with solid non-transparent panels and louvre panels available. Vinyl graphics and manifestation can provide customisation.

The overhead header unit contains the track, motor and microprocessor controller. Multi-position control switches set the modes of operation and are fitted on one or both sides.

Activation methods include:


- Overhead sensor both sides of the opening
- Push plate activation, either hard wired or battery operated and wall or post mounted
- Controlled entry (e.g. intercom, digital keypad, proximity fob, etc) or in combination with overhead sensor or push plate activation (all using a concealed solenoid lock)
- Activation signal from a remote fire alarm

Standard safety features to meet BS 7036 include:

- Double doorway hold open safety beams
- Automatic reverse on obstruction
- Battery backup in the event of power failure
- 'Automatic Door' and 'Keep Clear' stickers
- Finger and body trap protection

Optional safety features to meet BS 7036 include:

- Threshold safety presence sensor
- Framed barriers with glass infill
- Breakout of the doorleaves and sidescreens

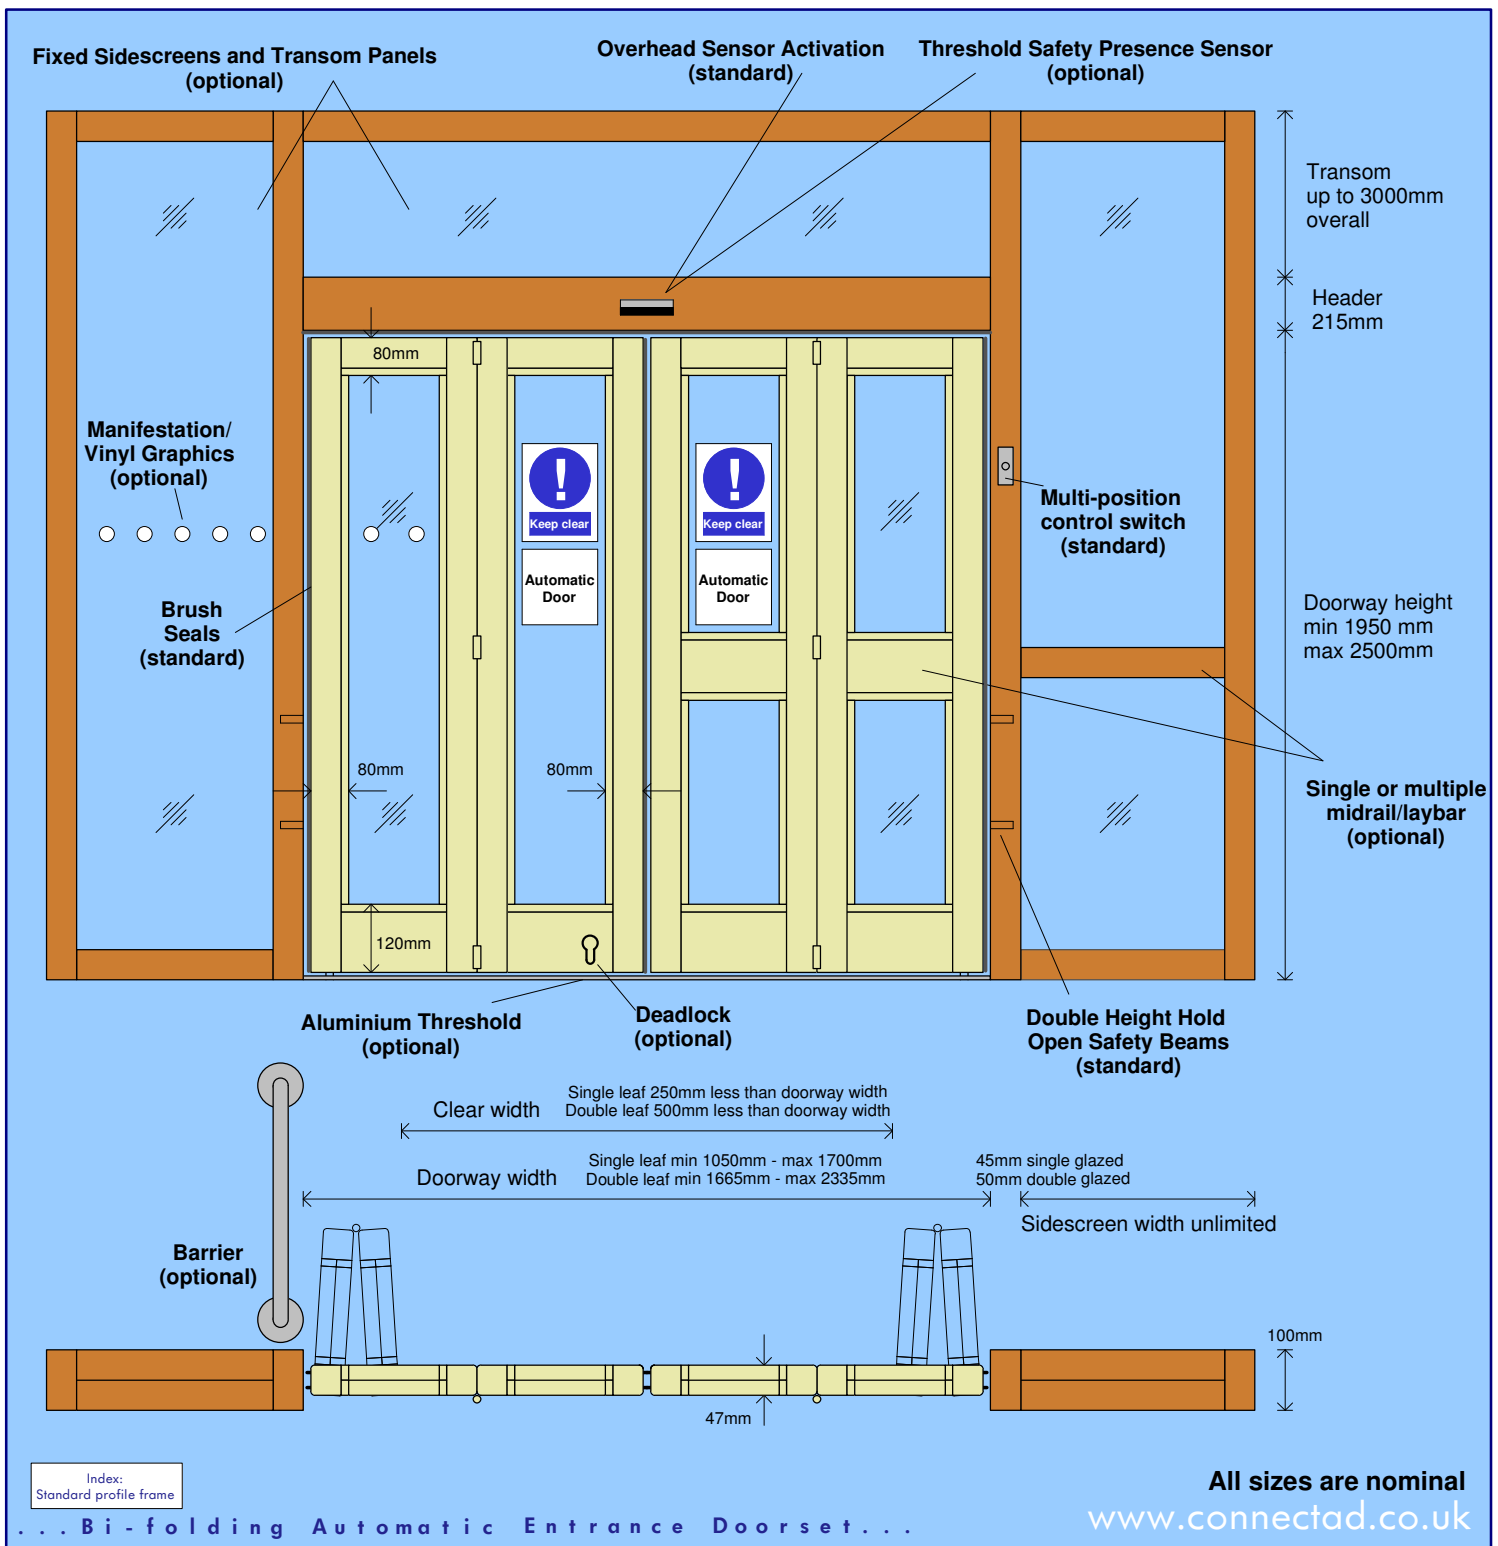

All connect a.d. Bi-Folding Automatic Entrance Doorsets are designed and manufactured to British Standard BS 7036 and meet the Disability Discrimination Act (DDA) regulations.

All site work is carried out to British Standard BS 7036 by our trained engineers and electricians to ensure a quality installation.

Customers are responsible for obtaining any required Planning Permission and approval from Building Control and the Fire Department.

We provide an efficient advice and after sales service to all customers.

Remember: Our reliable Maintenance and 24 hour Repair service is for all types of Door Entrance Systems, and not just our own design.

connect a.d.

...make an entrance...

Automatic Entrance Doors

Manual Entrance Doors

Disabled Access

connect a.d.
Block 59, Unit 4,
Hillington Park,
Glasgow G52 4LT

connect a.d. has a policy of continuous improvement. We therefore reserve the right to alter details without prior notice.

T: 0141 880 9797

F: 0141 880 2818

W: www.connectad.co.uk

E: info@connectad.co.uk



INVESTORS IN PEOPLE



Glass and Glazing Federation



connect a.d. is a division of tri group ltd.