

. . . S t r a i g h t S l i d i n g . . .

Index:
Standard profile frame

. . . A u t o m a t i c E n t r a n c e D o o r s e t . . .

The connect a.d. **S t r a i g h t S l i d i n g A u t o m a t i c E n t r a n c e D o o r s e t** is ideal for medium to high volume traffic and disabled access in commercial environments. The **standard profile frame** option is the most popular and cost-effective fully automatic door when upgrading the access and appearance of a building entrance.



Manufactured and Installed by connect a.d. for a car showroom

Rev 5 : 12/08

connect **a.d.**
...make an entrance...

The basic doorset comprises a doorleaf and frame and can be supplied either in single parting or double leaf bi-parting, commonly mounted on the inside of the building to slide in front of a side wall or sidescreen.

The doorleaf and frame are constructed from a standard aluminium profile and can be supplied as a complete entrance system with sidescreens and transom panels.

All complete doorsets are polyester powder coated to any BS or RAL colour, with Satin & Bronze Anodised finishes and Stainless Steel also available. Door colours should contrast surrounding colours to aid those with visual impairment.

Glazing options include single or double glazing in clear laminate, toughened, tinted or reflective glass, with solid non-transparent panels and louvre panels available. Vinyl graphics and manifestation can provide customisation.

The overhead header unit contains the track, motor and microprocessor controller. Multi-position control switches set the modes of operation and are fitted on one or both sides.

Activation methods include:

- Overhead sensor both sides of the opening
- Push plate activation, either hard wired or battery operated and wall or post mounted
- Controlled entry (e.g. intercom, digital keypad, proximity fob, etc) or in combination with overhead sensor or push plate activation (all using a concealed solenoid lock)
- Activation signal from a remote fire alarm


Standard safety features to meet BS 7036 include:

- Double doorway hold open safety beams
- Automatic reverse on obstruction
- Battery backup in the event of power failure
- 'Automatic Door' and 'Keep Clear' stickers
- Finger and body trap protection

Optional safety features to meet BS 7036 include:

- Threshold safety presence sensor
- Back edge safety presence sensor
- Full height glazed Pocketscreens
- Framed barriers with glass infill
- Breakout of the doorleaves and sidescreens



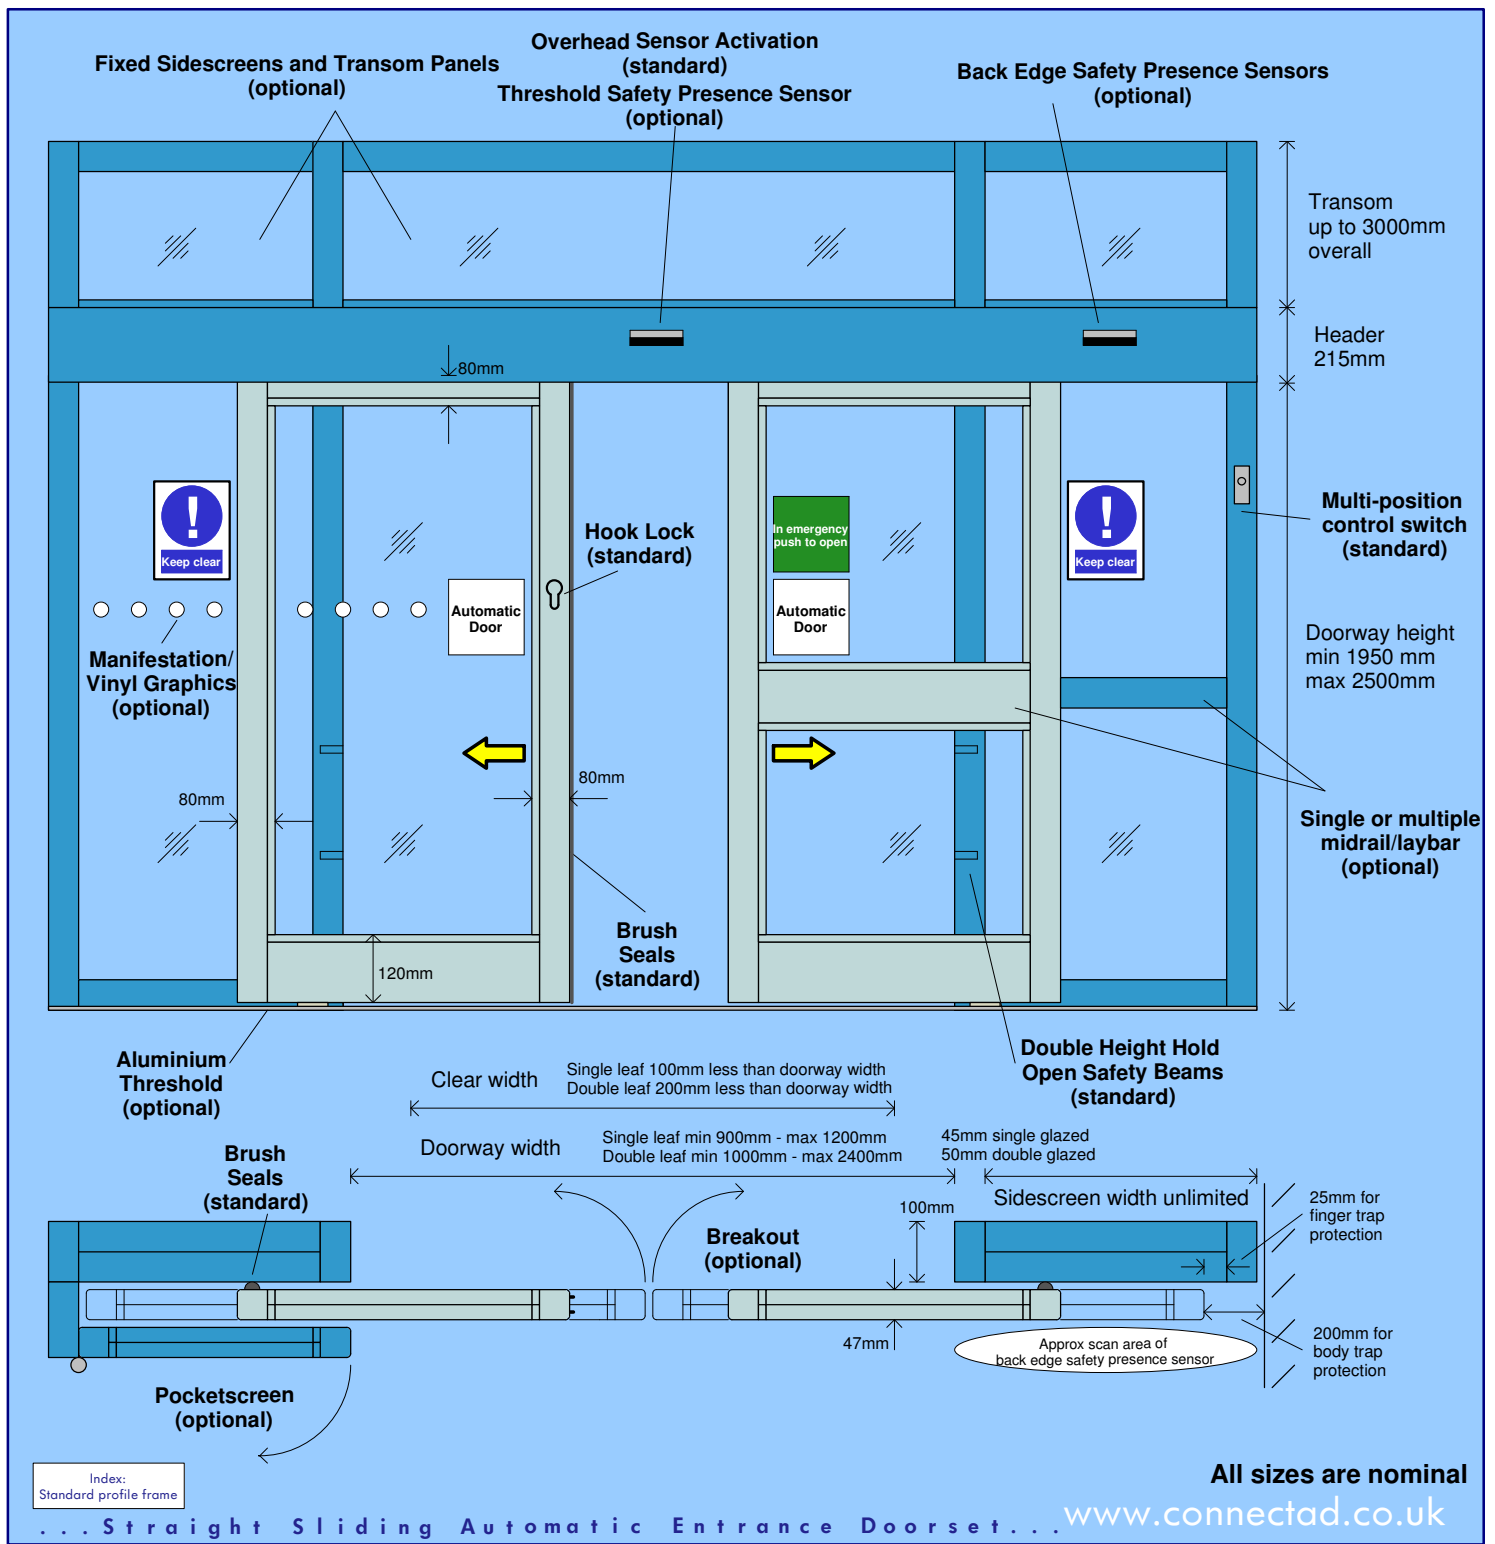

All connect a.d. Straight Sliding Automatic Entrance Doorsets are designed and manufactured in-house to British Standard BS 7036 and meet the Disability Discrimination Act (DDA) regulations.

All site work is carried out to British Standard BS 7036 by our trained engineers and electricians to ensure a quality installation.

Customers are responsible for obtaining any required Planning Permission and approval from Building Control and the Fire Department.

We provide an efficient advice and after sales service to all customers.

Remember: Our reliable Maintenance and 24 hour Repair service is for all types of Door Entrance Systems, and not just our own design.

connect a.d.

...make an entrance...

Automatic Entrance Doors

Manual Entrance Doors

Disabled Access

connect a.d. has a policy of continuous improvement. We therefore reserve the right to alter details without prior notice.

connect a.d.
Block 59, Unit 4,
Hillington Park,
Glasgow G52 4LT

T: 0141 880 9797

F: 0141 880 2818

W: www.connectad.co.uk

E: info@connectad.co.uk



INVESTORS IN PEOPLE



Glass and Glazing Federation



connect a.d. is a division of tri group ltd.